


**Rig 1: 4kW Open Loop HPU**

This compact 4kW open loop HPU can be used to power and control a wide range of small hydraulically powered equipment. It is of robust design and is suitable to be operated in the most hazardous environments the industry has to offer. It is capable of supplying up to 28L/min of flow, and has a maximum operating pressure of 230 Bar.

**Key Features:**

- Max. flow rate of 28L/min;
- Max. pressure is 230 bar;
- Versatile rig open to many applications;
- Suitable for a variety of oils;
- Fitted with return filtration unit, and a suction strainer;
- Locally operated;
- Compact and robust design.

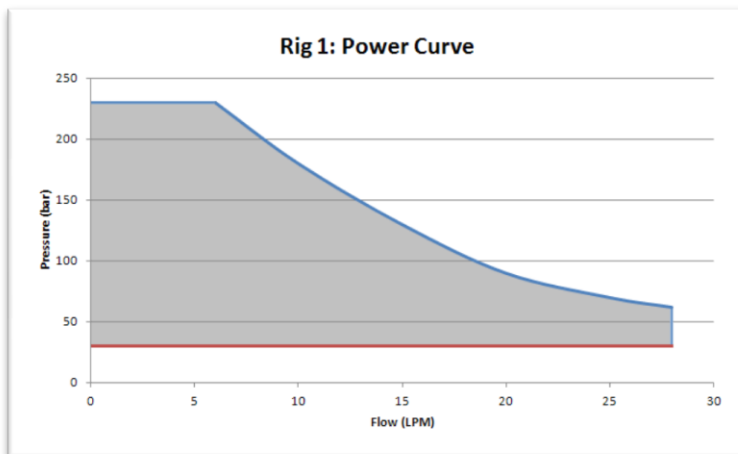

**Basic Specifications:**

Height:	1330mm
Width:	760mm
Length:	895mm
Weight:	0.8Te
Motor Power:	4kW
Voltage/Current Required:	400V/8.5A
Pump Max. Pressure	230 Bar
Pump Max. Flow	28L/min @ 1500RPM (50Hz Supply)



FHP Ltd, Unit BT 96/4,  
Fisher Industrial Estate, Fisher Street, Walker,  
Newcastle upon Tyne, NE6 4LT

Tel: 0191 2637272 Fax: 0191 2634016

Web: [www.fhpltd.co.uk](http://www.fhpltd.co.uk)

Registered in England No. 02044252.