


## Rig 2: 5.5kW Fixed Displacement HPU

This compact 5.5kW open loop HPU can be used to power and control a wide range of small hydraulically powered equipment. It is of robust design and is suitable to be operated in the most hazardous environments the industry has to offer. It is capable of supplying up to 35L/min of flow, and has a maximum operating pressure of 80 Bar.

### Key Features:

- Max. flow rate of 35L/min;
- Max. pressure is 80 bar;
- Versatile rig open to many applications;
- Suitable for a variety of oils;
- Fitted with return filtration unit, and a suction strainer;
- Locally operated;
- Compact and robust design.

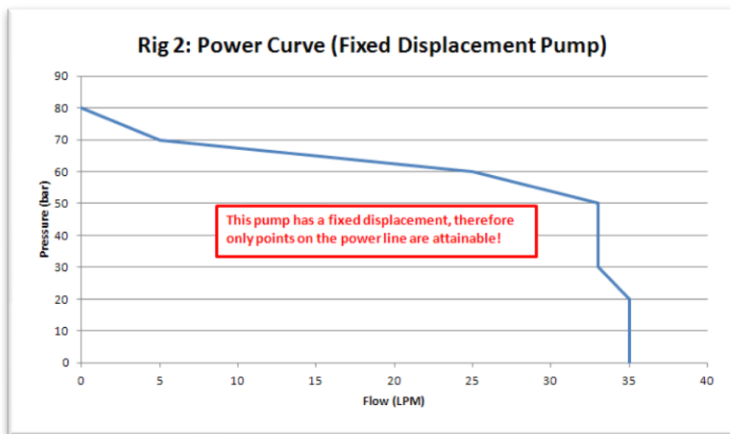

### Basic Specifications:

Height:	1405mm
Width:	868mm
Length:	883mm
Weight:	1.0 Te
Motor Power:	5.5kW
Voltage/Current Required:	415V/10.8A
Pump Max. Pressure	80 Bar
Pump Max. Flow	35L/min @ 1500RPM (50Hz Supply)



FHP Ltd, Unit BT 96/4,  
Fisher Industrial Estate, Fisher Street, Walker,  
Newcastle upon Tyne, NE6 4LT

Tel: 0191 2637272 Fax: 0191 2634016

Web: [www.fhpltd.co.uk](http://www.fhpltd.co.uk)

Registered in England No. 02044252.