


Rig 3: 15kW Open Loop HPU

This compact 15kW open loop HPU can be used to power and control a wide range of small hydraulically powered equipment. It is of robust design and is suitable to be operated in the most hazardous environments the industry has to offer. It is capable of supplying up to 41L/min of flow, and has a maximum operating pressure of 220 Bar.

Key Features:

- Max. flow rate of 41L/min;
- Max. pressure is 220 bar;
- Versatile rig open to many applications;
- Suitable for a variety of oils;
- Fitted with pressure filtration unit, and a suction strainer;
- Locally operated;
- Compact and robust design.

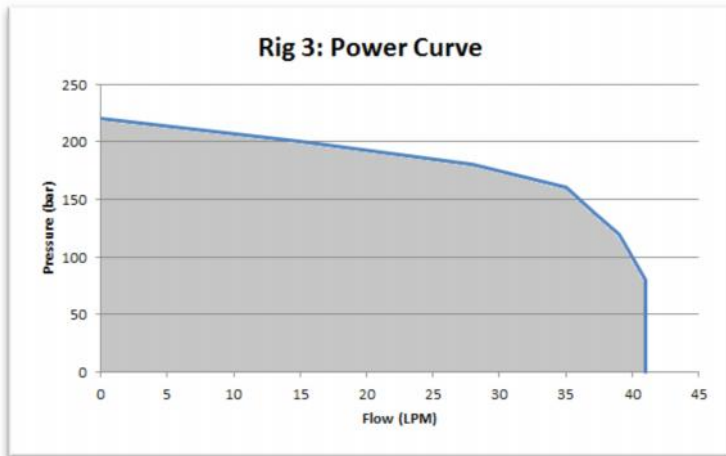

Basic Specifications:

Height:	1450mm
Width:	610mm
Length:	1050mm
Weight:	1.2Te
Reservoir Volume:	108L
Motor Power:	15kW
Voltage/Current Required:	400V/28.2A
Pump Max. Pressure	220 Bar
Pump Max. Flow	41L/min @ 1500RPM (50Hz Supply)



FHP Ltd, Unit BT 96/4,
Fisher Industrial Estate, Fisher Street, Walker,
Newcastle upon Tyne, NE6 4LT

Tel: 0191 2637272 Fax: 0191 2634016
Web: www.fhpltd.co.uk

Registered in England No. 02044252.