


**Rig 37: 15kW Open Loop HPU**

This compact 15kW open loop HPU can be used to power and control a wide range of hydraulically powered equipment. It is of robust design and is suitable to be operated in the most hazardous environments the industry has to offer. It is capable of supplying up to 90L/min of flow, and has a maximum operating pressure of 350 Bar. The system has an optional water cooler to keep the oil within its optimum working temperature, even in the hottest of climates.

**Key Features:**

- Max. flow rate of 90L/min;
- Max. pressure is 350 bar;
- Water cooler built in;
- Versatile rig open to many applications;
- Suitable for a variety of oils;
- Fitted with pressure, and return filtration units;
- Locally operated;
- Compact and robust design.

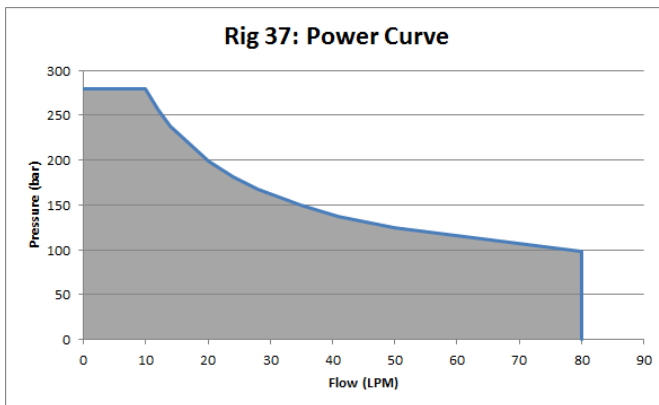

**Basic Specifications:**

|                           |                                 |
|---------------------------|---------------------------------|
| Height:                   | 1700mm                          |
| Width:                    | 1200mm                          |
| Length:                   | 1230mm                          |
| Weight:                   | 1.5Te                           |
| Motor Power:              | 15kW                            |
| Voltage/Current Required: | 415V/30A                        |
| Pump Max. Pressure        | 350 Bar                         |
| Pump Max. Flow            | 90L/min @ 1500RPM (50Hz Supply) |



FHP Ltd, Unit BT 96/4,  
Fisher Industrial Estate, Fisher Street, Walker,  
Newcastle upon Tyne, NE6 4LT

Tel: 0191 2637272 Fax: 0191 2634016  
Web: www.fhpltd.co.uk

Registered in England No. 02044252.



FHP Ltd, Unit BT 96/4,  
Fisher Industrial Estate, Fisher Street, Walker,  
Newcastle upon Tyne, NE6 4LT

Tel: 0191 2637272 Fax: 0191 2634016

Web: [www.fhpltd.co.uk](http://www.fhpltd.co.uk)

Registered in England No. 02044252.